



4 SIDES GLASS DOOR Showcase

Instruction Manual



Distributed by masterchefpr.com





787788-2264 787788-2269 787275-1643

787308-2132

Royal industrial Park 500 carr 869
suite 1003 Catano, PR 00966

ventas@masterchefpr.com

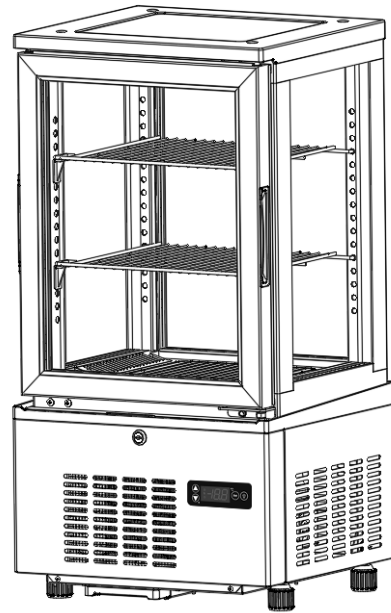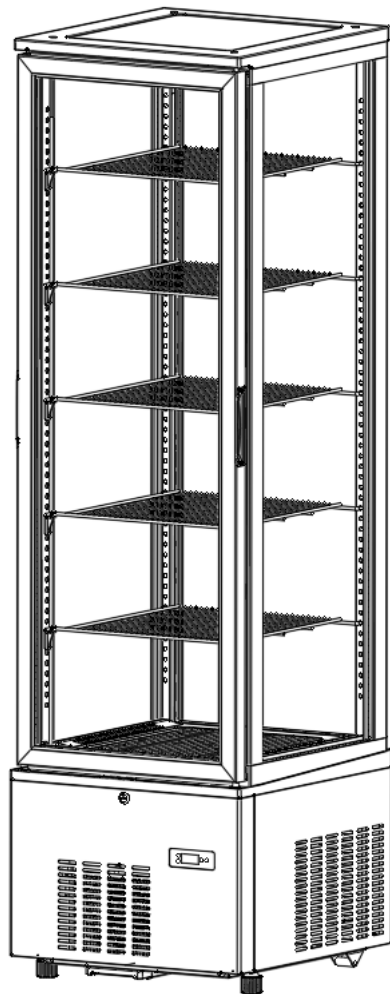

Before Use

- P1.P2.P3.P4.P5 Safety Instructions
- P6 Name and Function of Each Part
- P7 Electronic thermostat instructions
- P8 Installation and confirmation
- Before Operation
- P9 Well usage
- P10 In These Cases
- P11 Move on, abandoned, and transfer
- About the warranty
- P12P13 Product Style List
- Circuit diagram
- P15 Product warranties

*Thank you for buying this beverage cooler

*For safe and right usage ,please read this manual carefully and understand it completely before use.

*Please take extra care of safety before use.

*Please put this manual on a prominent place.

*Be sure the Beverage Cooler has been standing upright for at least 12 hours prior to plug-in.

Before you use your refrigerator, please read this owner's manual carefully.

Use this appliance only for its intended purpose as described in this owner's manual.

This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

Please according to local regulations regarding disposal of the appliance for its flammable refrigerant and blowing gas. Before you scrap the appliance, please take off the doors to prevent children trapped.

This refrigerator must be properly installed in accordance with the installation instructions before it is used.

Never unplug you refrigerator by pulling on the power cord. Always grasp the plug firmly and pull straight out from the outlet.

This refrigerator must be positioned so that the plug is accessible.

If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.

Do not run cord over carpeting or other heat insulators. Do not cover the cord. Keep cord away from traffic areas, and do not submerge in water.


- 1) Do not clean your unit with flammable fluids. The fumes can create a fire hazard or explosion.
- 2) Do not tip over.
- 3) If the refrigerator is brought in from outside in the winter season, give it a few hours to warm up to room temperature before plugging it in.
- 4) Repair or replace immediately all electric service cords that have become frayed or otherwise damaged. Do not use a cord that shows cracks or abrasion damage along its length, the plug or the connector end.
- 5) Unplug your refrigerator before cleaning or before making any repairs. **NOTE:** *If for any reason this product requires service, we strongly recommend that a certified technician perform the service. Repairs made by non-qualified personnel will void the warranty.*
- 6) Do not operate your refrigerator in the presence of explosive fumes.
- 7) The power supply must be properly grounded. Proper grounding must be ensured to reduce the risk of shock and fire. Do not cut or remove the grounding pin! If you do not have a three-prong electric receptacle outlet in the wall, have a certified electrician install the proper outlet. The wall receptacle must be properly grounded.
- 8) Do not use an adapter plug or extension cord.
- 9) Exercise caution and use reasonable supervision when appliance is used near children.
- 10) When transporting the refrigerator, keep the unit in the upright position. Do not tilt the appliance beyond 45° or place the unit in upside down position.
- 11) This appliance must be earthed.
- 12) Do not place cooler in environment temperatures that exceed 4(30°,RH 55%),

13) Shelving maximum load per shelf is 40 kg

- Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.



- **Warning: Risk of fire/flammable materials used.**
- **WARNING:** Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction.
- **WARNING:** Do not damage the refrigerant circuit.
- **WARNING:** Do not use mechanical devices or other means to accelerate the defrosting process or ice harvesting process, other than those recommended by the manufacturer.
- **WARNING:** Do not use other type of electrical appliances inside the unit unless they are of the type recommended by the manufacturer
- To avoid a hazard due to instability of the appliance, it must be placed at an even or flat surface.






Correct Disposal of this product	
	This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Safety Instructions


Read all instructions before using this cooler

Following these safety considerations is very important.


Representation and meaning as follows.

	Warning	It means that wrong operation may cause death or serious injury		This pattern is to attract attention
	Attention	It means that wrong operation may cause injury or damage		prohibition
				Enforcement


Warning

 To be used to prevent leakage of dedicated power supply


If the power plug on the way to use socket extension, dogan wiring and so on lead to hot wire cause fire.


 Power plug must look up to the end, if there is dust adhesion, should be cleaned on a regular basis.

Socket inserts is incomplete, or plug part accumulation of dust, can cause electric shock or fire


 Don't damage or bind the power cord

Stretching, bundling, place heavy objects, clamp like fever, caused by the fire, short circuit, electric shock.


 When an exception occurs, to cut off the leakage interrupt or unplug the power supply
An exception occurs is still running can cause electric shock and fire.

 A leakage action, contact shop or contact professionals


Forced to restore power supply, can cause electric shock and fire

 Do not use outdoors


Use it where got wet by rain will lead to leakage, electric shock


 Please let sales professionals for installation in the shop


Improper installation will cause electric shock, fire on its own

 Don't move the body with the door open


Because of the door, or a commodity dumping cause accidents


 Don't store volatile, flammable items contained in the cabinet
Will cause explosion, fire.


 Display the distance must be separated from around 20 cm above
The body heat accumulation, lead to poor performance and failure


 The earth wire must be set


Ground wire is not perfect cause electric shock and fire, must seek professional Settings


 Don't use wet hand electric equipment such as power plug part and switch
Lead to get an electric shock


 When cleaning, maintenance, inspection, want to unplug the power supply
Don't remove the power supply will cause electric shock or rotary part caused by injury


 Don't directly into display ark adding water
Will cause a short circuit, and get an electric shock


 To install in a solid, flat on the ground level
Installation is not stable, the dumping of words will cause an accident

 Do not install where combustible gases are likely to leak
Due to pull plug, fire broke out

 In case temperature rise due to the cause of the problem, not to save food
Can cause food poisoning


 A short time without use, unplug the power plug, or cut off power supply
Will lead to leakage, fire

 Don't break down, the transformation
Refrigerant gas omissions caused injury, electric shock, or abnormal behavior, and cause an accident

 Please find professionals move set, waste
Improper installation guide failure or improper placement can cause children locked up

Safety Instructions

Attention


 Do not put it on the places where it may obstruct

■ traffic and disaster prevention


■ escapement


■ aerosol extractors and firewall


*or it may break the law


 When pulling the plug, hold it and then unplug


If only hold wire to unplug, the wire may be broken which can cause fire.


 Intended use: Only use it to preserve goods in short time. otherwise the goods may go bad.


 Do not put hands or thin stick into the machine room in case of damage inside the machine room


 Do not put or use flammability spray and solvent on the visicooler, which can cause fire and damage of resin part when meeting sparks of electric system.

 Do not put objects on the top of the visicooler. Because if it drops, it can cause damage and it also damage the top.


 Do not put fingers into the gap when close the visicooler door in case of hurting finger


 The visicooler should be put on waterproof place, because the condensation and drainage may moistening the floor.


 When install the visicooler, if it slopes, please open the power switch after more than 3 hours. If not, it may cause the blocking of compressor and flues.


 After pulling the plug, please wait more


than 5 minutes before plug again. If not, it can bring burden to compressor, causing breakdown.


 Do not put hot goods in the cabinet. If not, hot goods can lower the cooling capacity, causing breakdown.


 Do not put hot goods, or put goods near the heat engine, which can cause damage of ceiling version, lower the cooling capacity, and body of visicooler dissolving causing fire.


 If it will not be used for long time, please take out goods in it, pull out the plug, because the plug gathers ash can cause heat and even fire.


 Do not throw object into the cabinet in case of damage

 Please do not put goods on the entrance and exit of air conditioning in the visicooler. It may cause breakdown of compressor, and the cooling performance is lower or malfunction.

 Please do not use mechanical method or other method to defrosting.

 Please do not install any electrical apparatus element in the visicooler without the permission of manufacturer.


 Please give it to special recycling center when the body of the visicooler needs to be abandoned.

 Refrigerant and foam layer is inflammable, please keep away from fire.

Name and Function of Each Part

■The opening of the door can be right or left


*Open door hinge on the set of hinge, hinge screw, can tear open come down to the door, and then remove the door installation to the other side of the hinge in the screw holes.

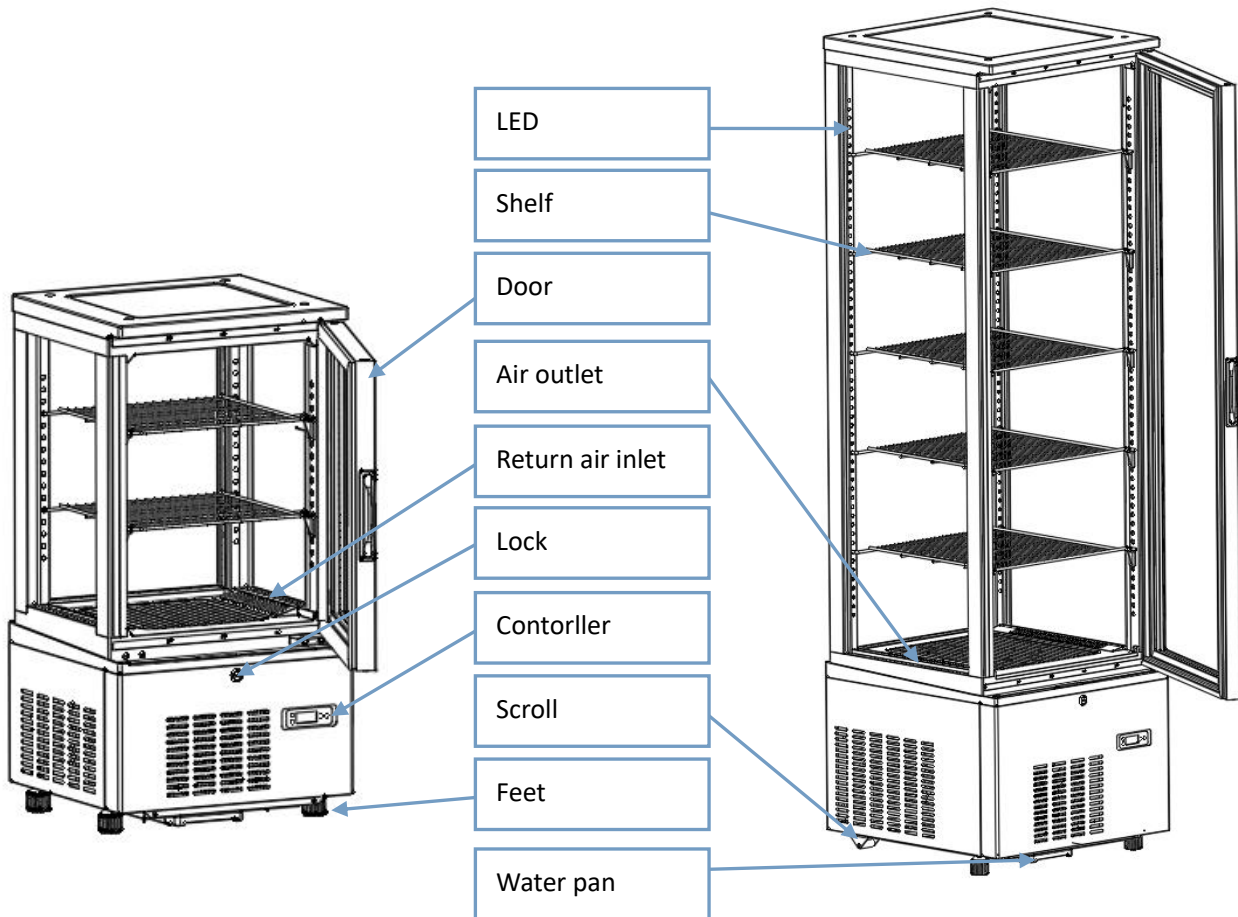







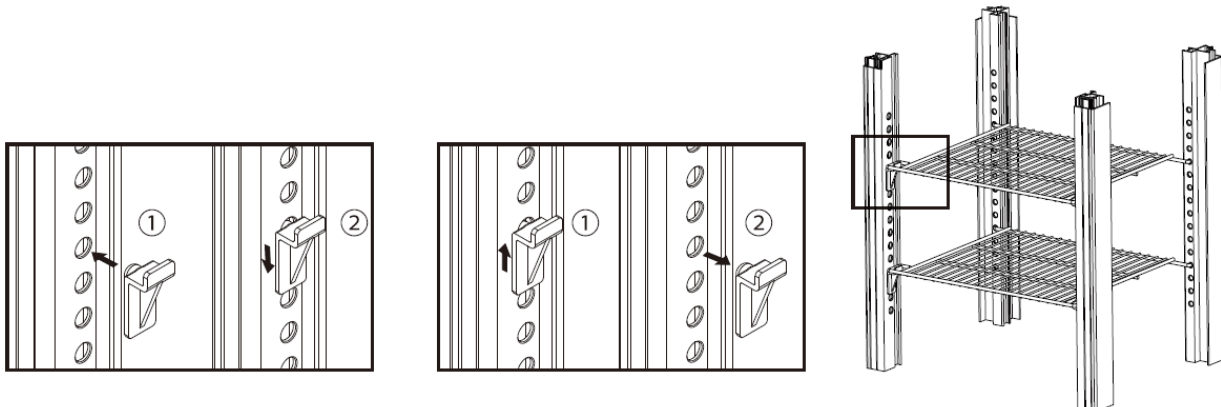






■The location of the shelf can be adjusted

*When adjusting the shelf,pulling the support rack ladder code is shown in figure to adjust.

*The shelf load: 7KG



■ Electronic thermostat instructions

Electronic thermostat instructions	
	 Inner temperature, 4 degree default
	 Set
	 Led ON or OFF
	 Temperature regulation
	 Temperature regulation and Defrosting
	 Running indicator light
	 Caution light
	 Defrosting
User parameter setting	
1、 press SET key for one second to enter user parameter	3、 press SET key for one second, It will save the current parameter
2、 press the key  or  to adjust parameter	
LED	
Press the key  can open/close light. Close default	
Defrosting	
Press the key  three seconds ,Force to start/finish defrost.	
Alarm	
[E0]: Sensor failure	

* The first test running.

After the product was moved, it had better to turn on the power for 30 minutes.

- We suggest the customers , after the first automatic shutdown, and then placed in the box to store food.

Technical Specifications

Model	18MCSC278
Parameter	110V~60Hz
Capacity	9.86Cuft
Temperature(°F)	35.6~53.6°F
Refrigerant	R290
Net weight	189.60lb
Size	20.27x21.77x70.87in
Power(W)	230W

Installation and confirmation

■ Installation

To avoid the special place

*Please avoid installing it in a hot spring area and sulfur area

* Please avoid installing it in coast and salt area

Install it at well ventilated area

Install it on where it will not be splashed by water

* Place of the suction or discharge empty out more than 20 cm before

*To avoid being in rain or heavy moisture

To install it in places away from the heat

To install it on the ground strong enough and waterproof

*To avoid direct sunlight

*To avoid putting it on wooden floor or carpet

*To avoid putting it near the heating appliances such as oven, fryer

* To avoid putting it near the floor without waterproof equipment

Freezer needs to be installed horizontally

*This visicooler needs to be installed horizontally

Before operation

■ Check after installation

*After installation, it is necessary to check if settings are correct with the guests and professional on-site.

*Check if the rack accessories is right combined

*Manual and warranty must be properly kept by the guest

Methods of operation and stop

■Operation

1.To determine whether the special distribution of brake socket is in a state of OFF

2.Please insert the plug in a dedicated socket

3.Please put the special socket power brake set to ON

*After electrify starting ,It will take some time from refrigeration operation to achieve cooling effect,

please put food in the freezer when it is cool totally

■Stop

1.Please set the special socket power brake to OFF

2.Please pull the plug from the special socket

*If start working immediately after the stop, it will make burden to refrigerator and causing breakdown. So it must be operated after more than 5 minutes.

Well Usage

- Don't place too much goods in the cabinet
- The opening and closing the door should be in limit distance
- * Please don't leave the door opening all the time
- * If the door is not sealed when it is closed, cold air will run outside, lower in the refrigeration capacity.
- * Please avoid opening and closing the door frequently
- * Cold air circulation will not be performed, lowering the refrigeration capacity.
- * opening and closing the door should be fast.
- Please only put goods need to be refrigerated
- * The visicooler is specially designed for storing goods need to be refrigerated. Instead of refrigerating normal temperature goods. If it is effected by other goods, it may lower the refrigeration capacity.

The outside and inside maintenance and cleaning of the showcase

- In order to increase the service life of the product, please periodically maintain and clean.
- Please unplug the visicooler when maintain and clean it for safety.
- Please don't use solvent like cleanser, acidic water, light oil, thinner, and hot water, because they can cause damage to product material.
- Please don't wash it directly with water pipe.

- The outside and inside cleaning of the showcase
- * Please wipe it with cloth containing neutral detergent, then wipe it with wet towel, and at last wipe it with dry towel when it is dirt.
- * The flavoring substances can accelerate the degradation of the door sealing strip, Please clean it regularly.
- * Please don't use business use of alkaline detergent which could cause degradation to the resin part.

In These Cases

■Product when an exception occurs, please survey the content of the project, with a shop to have negotiation with

Out of operation no refrigeration	Is there a power outage The power plug is not on the socket Is Power distribution brake and fuse have disconnected ?
Refrigeration result is bad	Set the temperature control is appropriate ? If the door tightly shut If the door switch frequency comparison The casing of the product is placed too much? Whether to put into the hot goods? Whether directly from direct sunlight The surrounding ventilation is not good enough Whether the rolls of cold air inlet and blowing export was blocked by goods
Excessive cooling	Set the temperature control is appropriate ? The surrounding temperature is below 5 °C?
Frosty	The door is open? Plum rains season or summer when moisture is more, there will be a frost, but these are the water cooled in air after material and formation of the frost, is not a failure. Sometimes please wipe cloth, etc
Voice disorder	The ground is flat If products are placed? Products with or without contact with other objects? The body of the buoyancy, become warped on foot.

* This conversion board have radiator, though change the phenomenon of hot, but it is not abnormal trouble

Move on, abandoned, and transfer

- About products move set, transfer, don't need
- About products move set
 - * Because of the need to confirm the place where setting conditions, power supply and other conditions, please must find professionals
- When abandoned
 - * Please find professionals
 - * Product placement, children could be shut inside and cause accidents
 - * It is not proper waste will be treated as illegal behavior will be punished
- transfer situation
 - * Transfer, in order to allow a user to secure the right to use, please put the manual tape paste marked the location of the body.
- Long time not in use
 - * Please put the power plug from the socket
 - * Please put all the rolls goods out of storage, placed mildewy, produce fumes. For cleaning the house of the rolls.

About the warranty

- warranty certificate
 - * The goods from the attached "builders", please fill out on bond, date of purchase, store name . Please read carefully to ensure the content, safekeeping
- During the warranty repair
 - * During the warranty period, according to the content of the specified in the builders, sales store for repair.
- The repairs after the warranty period
 - * About repairs after the warranty period, please feel free to buy store. If can repair, will charge for repair on business.
- about consulting
 - * For other after-sale service, if there are any unclear matters, please consult the store purchase.
- For repair, please inform us the following items

model	The native metals have marked on the card
Purchase date and production models	Builders are recorded
fault status	Please describe in detail the fault condition
customer name address and phone no.	Please let us know the business hours, rest days,
The date of the clear wish to visit	suitable for visit date, etc



Distributed by masterchefpr.com



☎ 787788-2264 787788-2269 787275-1643

☎ 787308-2132

Royal industrial Park 500 carr 869
suite 1003 Catano, PR 00966

📧 ventas@masterchefpr.com